


Product description

Rockwool Marine Batts 32 RL is a soft, resilient roll made of stone wool.
 Marine Batts 32 RL is supplied as a highly compressed roll. The product is as standard supplied with reinforced alu foil.

Application

Marine Batts 32 RL is used for comfort insulation. The high compression reduces the transport cost significantly.

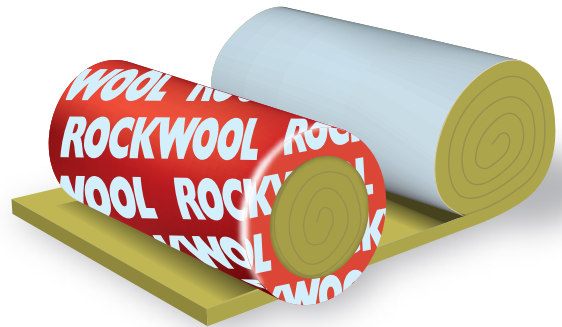


Technical properties

Parameter	Value	Standard
Thermal conductivity	$\lambda_{10} = 0,036 \text{ W/mK}$ $\lambda_{30} = 0,045 \text{ W/mK}$	EN 12667
Nominal density	32 kg/m ³	-
Compressive strength	-	EN 826
Fire classification	Non-combustible	IMO A.799(19)
Water absorption (short term)	<1 kg/m ²	EN 1609 AC
Max. service temp.	Wool: 150°C Facing: 80°C	-
Sound absorption directly mounted	-	ISO 354 (approximated) Evaluated after ISO 11 654
Facings	Reinforced alu foil	IMO A.653(16) (low flame - spread)
Dimensions	Marine Batts 32RL: L: 4000 mm - W: 1000 mm - T: 50,75,100 mm	



Rockwool A/S
 DK-2640 Hedehusene
 Tel.: +45 46 56 16 16
 Fax: +45 46 56 16 04
 E-mail: export@rockwool.dk
 Internet: www.rockwool-marine.com

Rockwool Marine & Offshore:
 Hong Kong Office
 Suite 1303, Asia Orient Tower, Town Place
 33 Lockhart Road, Wanchai, Hong Kong
 Tel: +852 2866 6180
 Fax: +852 2866 9555



Rockwool A/S reserves the right to make necessary product changes at any time. Technical specifications are thus stated subject to change.