


### Product description

Rockwool HC Wired Mat 150 is made of stone wool.  
 One side is faced with 1'' galvanized wire netting. The wire netting is stitched on with galvanized wire.  
 The product can be supplied with reinforced alu foil.

### Application

HC Wired Mat 150 is used for hydrocarbon fire protection of bulkheads and decks.

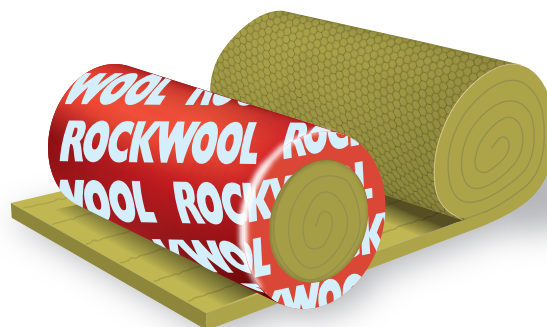


### Technical properties

Parameter	Value	Standard
<b>Thermal conductivity</b>	$\lambda_{10} = 0,034 \text{ W/mK}$	EN ISO 8497
<b>Nominal density</b>	150 kg/m <sup>3</sup>	-
<b>Compressive strength</b>	-	EN 826
<b>Fire classification</b>	Non-combustible Approved for H constructions	IMO A.799(19) IMO A.754(18)
<b>Max. service temp.</b>	Wool: 750°C Facing: 80°C	-
<b>Sound absorption directly mounted</b>		ISO 354 (approximated) Evaluated after ISO 11 654
<b>Facings (on request)</b>	Reinforced alu foil	IMO A.653(16) (low flame - spread)
<b>Dimensions</b>	HC Wired Mat 150: L: 4000 mm - W: 500 mm - T: 40 mm	



Rockwool A/S  
 DK-2640 Hedehusene  
 Tel.: +45 46 56 16 16  
 Fax: +45 46 56 16 04  
 E-mail: export@rockwool.dk  
 Internet: www.rockwool-marine.com

Rockwool Marine & Offshore:  
 Hong Kong Office  
 Suite 1303, Asia Orient Tower, Town Place  
 33 Lockhart Road, Wanchai, Hong Kong  
 Tel: +852 2866 6180  
 Fax: +852 2866 9555



Rockwool A/S reserves the right to make necessary product changes at any time. Technical specifications are thus stated subject to change.