


Product description

Rockwool Marine Batts 45 RL is a soft, resilient roll made of stone wool.

Marine Batts 45 RL is supplied as a highly compressed roll. The product can be supplied with reinforced alu foil.

Application

Marine Batts 45 RL is primarily used for comfort insulation. The high compression reduces the transport cost significantly.

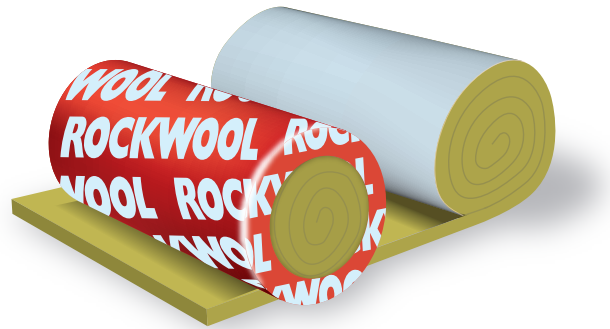


Technical properties

Parameter	Value	Standard
Thermal conductivity	$\lambda_{10} = 0,034 \text{ W/mK}$	EN 12667
Nominal density	45 kg/m ³	-
Compressive strength	-	EN 826
Fire classification	Non-combustible	IMO A.799(19)
Max. service temp.	Wool: 250°C Facing: 80°C	-
Sound absorption directly installed	$\alpha_w = 0,75$ Thickness: 50 mm	ISO 354 (approximated) Evaluated after ISO 11 654
Facings	Reinforced alu foil	IMO A.653(16) (low flame - spread)
Dimensions	Marine Batts 45 RL: L: 3000 mm - W: 1000 mm - T: 50 mm	



Rockwool A/S
DK-2640 Hedehusene
Tel.: +45 46 56 16 16
Fax: +45 46 56 16 04
E-mail: export@rockwool.dk
Internet: www.rockwool-marine.com

Rockwool Marine & Offshore:
Hong Kong Office
Suite 1303, Asia Orient Tower, Town Place
33 Lockhart Road, Wanchai, Hong Kong
Tel: +852 2866 6180
Fax: +852 2866 9555



Rockwool A/S reserves the right to make necessary product changes at any time. Technical specifications are thus stated subject to change.